

Fully Sealed Stable Matting


The Rubber & Resin Specialists



Quattro's range of mats can be bonded to new and existing floors using our Matbond urethane resin. The resin expands as it cures to take a hold of the grooves and joints in the mats from underneath.





Once the mats are in place the joints between the mats are cut out using a heated rubber groover. The cut strip is then removed to leave a clean open groove.

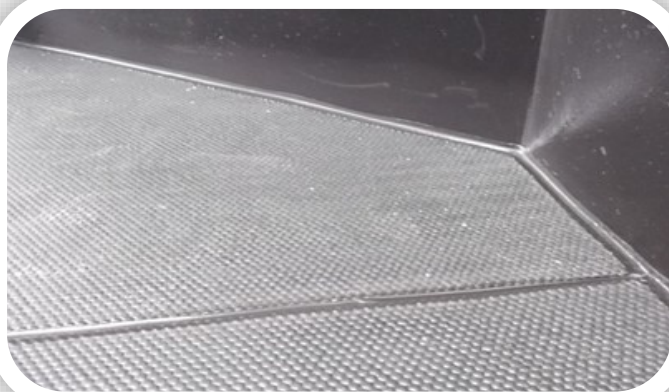

The joints are then sealed using our Q/Flex Gun applied flexible urethane resin as well as the perimeter of the area.



Heavy duty plastic doorway strips are fitted in to doorways or along drains to protect the edge of the mat

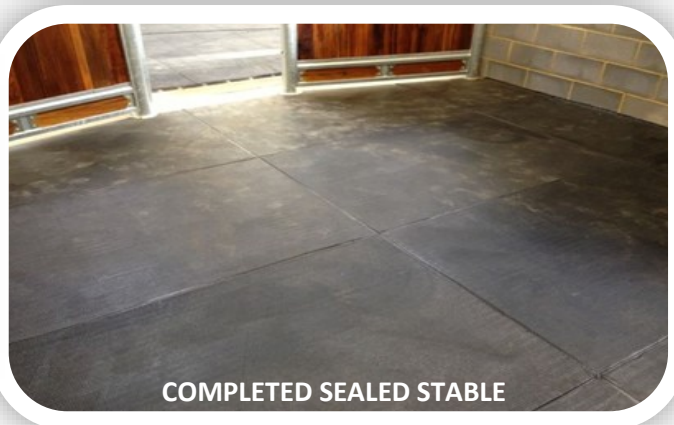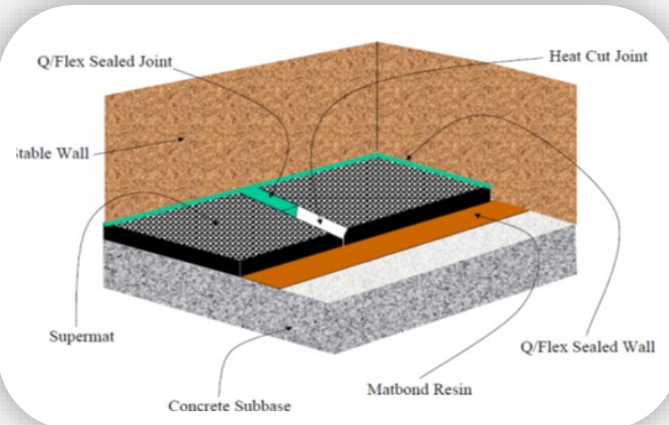

Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: enq@quattro.org.uk Web: www.quattro.org.uk

